



GUAM WATERWORKS AUTHORITY

Gloria B. Nelson Public Service Building | 688 Route 15, Mangilao, Guam 96913

P.O. Box 3010, Hagåtña, Guam 96932


Tel. No. (671) 300-6846/48 Fax No. (671) 648-3290

IFB 2025-05

Hagatna Wastewater Treatment Plant Clarifier Parts

This addendum serves to revise the previously issued bid documents and/or provides additional information for informational purposes. In cases where the responses below result in modifications to the bid documents, please consider them as amendments to the original IFB.

The following responses address questions received from potential bidders on December 24, 2024. Bid submissions must be received no later than Monday, January 27, 2024, at 10:00 am., Chamorro Standard Time (Guam time) unless revised via RFI or Bid Amendment. Submissions received after the closing time for receipt will not be considered.

	Question/Inquiry Received:	GWA RESPONSE:
1.	<p>Section 1 – Bid Items (Page 6 of 45)</p> <ul style="list-style-type: none"> Items 1 through 4 (scraper flights and chain attachments) do not have a unit of measurement assigned to them. We can interpret them to be individual parts, so “pieces” would be the appropriate unit of measurement. Please confirm that the unit of measurement is “pieces.” 	<p>Yes, the units of measure are “pieces”.</p>
2.	<p>Section 1 – Bid Items (Page 6 of 45)</p> <ul style="list-style-type: none"> Items 1 and 2 (scraper flights) typically require mounting holes and cutouts for wear shoes to be included. However, no drawings were included to confirm they are to come that way. It is also customary to order these as cut to length only without any holes or cutouts so plant personnel can modify them to suit. These are called “blanks”, as they have no holes. Please confirm what condition these flights are to come in: ready to install or as “blanks.” If ready to install, please provide drawings of the current flights so we can price in the required number of holes and cutouts. 	<p>The condition of the flights should be ready to install. Please follow the specifications provided in the bid and refer to the shop drawing in this RFI response.</p> 
3.	<p>Section 1 – Bid Items (Page 6 of 45).</p> <ul style="list-style-type: none"> Items 5 and 6 (collector chain) do not have a unit of measurement assigned to them. They can be purchased as links or in 10 ft long strands. Please provide the unit of measurement: links or strands. 	<p>Amendment to Line Item 5.0 (Section VI):</p> <p>Before Amendment: Quantity stated as 150. After Amendment: Quantity updated to 15 strands.</p> <p>Amendment to Line Item 6.0 (Section VI):</p> <p>Before Amendment: Quantity stated as 45. After Amendment: Quantity updated to 5 strands.</p> <p>(The unit of measure is specified in 10-foot strands, with a total of 15 strands for Item No. 5 and 5 strands for Item No. 6.)</p>

4.	<p>Section 1 – Bid Items (Page 6 of 45)</p> <ul style="list-style-type: none"> • Items 7 through 9 (wear strips) do not have a unit of measurement assigned to them. • They can be purchased in total feet required or in 10-foot-long sections. • Please provide the unit of measurement: feet or strands. 	<p>Amendment to Line Items 7.0, 8.0 and 9.0 (Section VI):</p> <p>Before Amendment: No unit of measure specified. After Amendment: Unit of measure updated to “10-foot strands.” All quantities and other specifications remain unchanged.</p>
5.	<p>Section 1 – Bid Items (Page 6 of 45)</p> <ul style="list-style-type: none"> • The descriptions for Items 7 through 9 (wear strips) state that they are to have 5 holes in them. These holes are for mounting to a return track or directly to the tank floor. • However, the Technical Specifications on Page 8 of 45 states that they are to be interchangeable with Evoqua J-Track. The wear strips for J-Track do not have mounting holes, and they are slid onto the J-shaped return track or onto cleats mounted to the tank floor. • Please provide the type of wear strip to be provided: with mounting holes or slide-on type (without mounting holes) 	<p>Amendment to Technical Specifications for Items 7.0 through 9.0, First Bullet</p> <p>The first bullet point under Technical Specifications is deleted: <i>“Interchangeable with existing Evoqua J-Track, non-metallic return track system.”</i></p> <p>All other specifications remain unchanged.</p>
6.	<p>The words “bidder” and “contractor” are used throughout the bid documents.</p> <ul style="list-style-type: none"> • Bidder implies supplying parts only with the plant installing them as needed. • Contractor implies supplying and installation of said parts. • Please provide the definition of what is expected: supply only, or supply and install 	<p>GWA will be installing the parts in-house and expects the supply of parts only. Therefore, the contractor’s responsibility is to supply ONLY.</p>
7.	<p>All of the forms contained in Pages 29 to 39 of the bid documents require notarization by a Guam notary. As we are located in the contiguous United States, we don’t believe we have ready access to a Guam notary. Please confirm that a Guam notarization is required or a local notary may be substituted.</p>	<p>All forms contained on Pages 29 to 42 of the bid documents indicate a requirement for notarization by a Guam notary. As you are located in the contiguous United States, you may not have access to a Guam notary. To clarify, a local notary is acceptable and may be substituted in place of a Guam notary.</p>

Bidders are also notified to visit the GWA website: www.guamwaterworks.org to ensure that any addenda to the bid, answers to questions, and reminders are communicated to all bidders during the solicitation process.




1/9/2025


Miguel C. Bordallo, P.E.
General Manager

Date




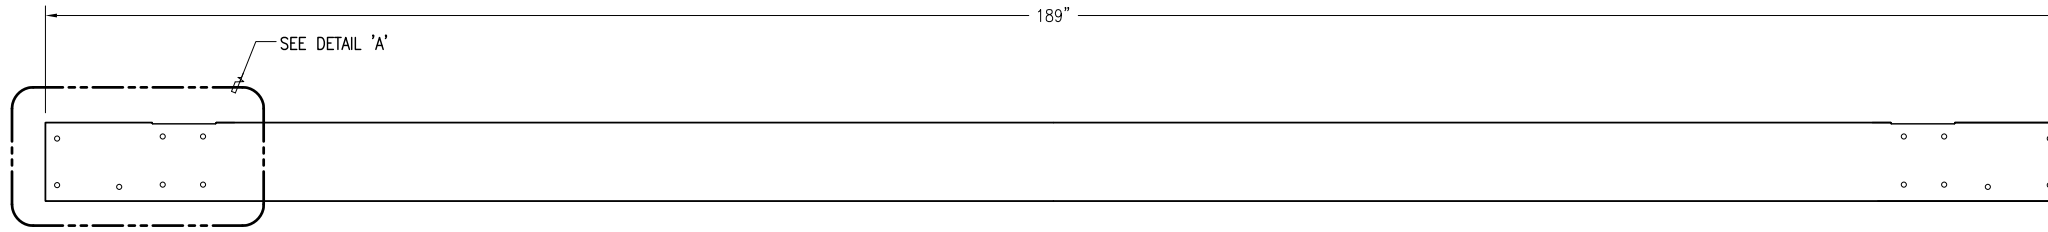

1 LONG COLLECTOR FLIGHT
HORIZ. SCALE: N T S

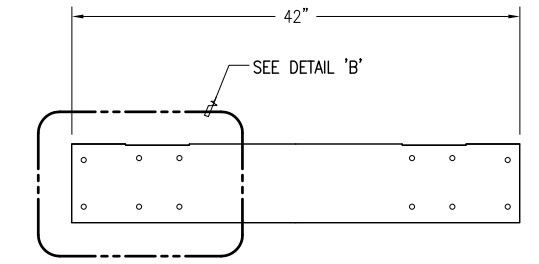


2 CROSS COLLECTOR FLIGHT
HORIZ. SCALE: N T S

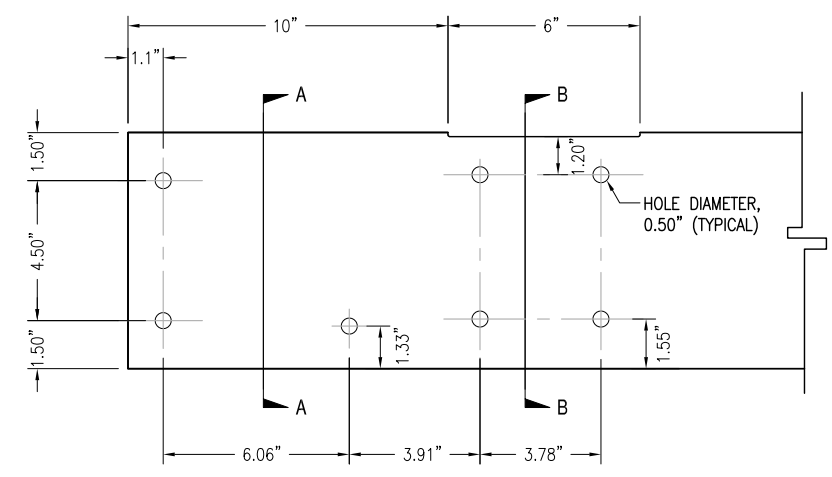


3 DETAIL 'A'
HORIZ. SCALE: N T S

- NOTES:
1. DETAIL AT THE OTHER END OF LONG COLLECTOR FLIGHT IS A MIRROR OF THIS DETAIL.
 2. CONTRACTOR/VENDOR IS REQUIRED TO CONDUCT IT OWN MEASUREMENTS PRIOR TO ORDERING OF THE COLLECTOR FLIGHTS.

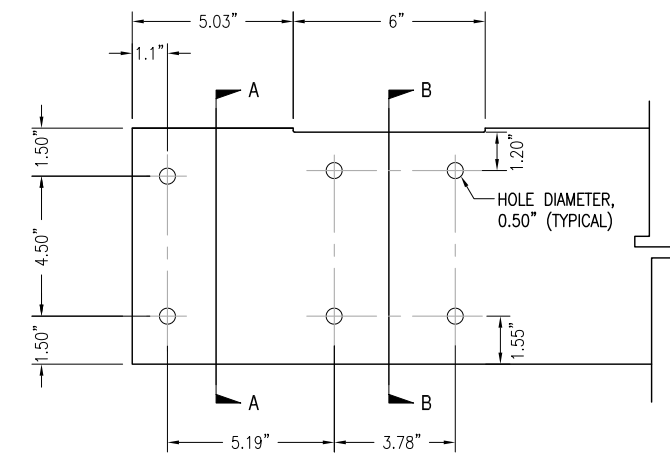


4 DETAIL 'B'
HORIZ. SCALE: N T S

- NOTES:
1. DETAIL AT THE OTHER END OF CROSS COLLECTOR FLIGHT IS A MIRROR OF THIS DETAIL.
 2. CONTRACTOR/VENDOR IS REQUIRED TO CONDUCT IT OWN MEASUREMENTS PRIOR TO ORDERING OF THE COLLECTOR FLIGHTS.

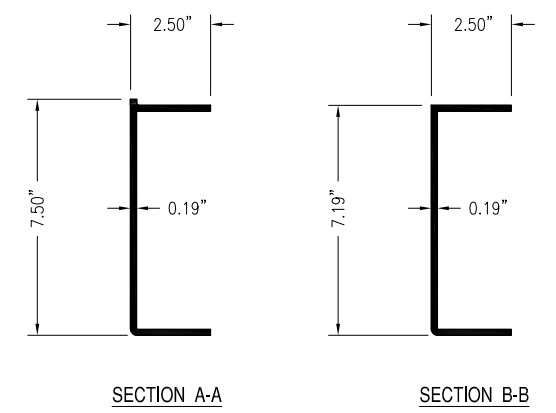

5 SECTIONS
HORIZ. SCALE: N T S

REVISION	DATE	BY		
			 GUAM WATERWORKS AUTHORITY GLORIA B. NELSON PUBLIC SERVICE BUILDING 688 ROUTE 15, MANGILAO, GUAM 96913	
GWA PROJECT NUMBER			PROJECT:	
IN-HOUSE DESIGN			HAGATNA WASTEWATER TREATMENT PLANT	
ENGINEERING DIVISION			REPLACEMENT OF COLLECTOR FLIGHTS	
DES. BY:	CHK. BY:	CONTENTS:		ID NO.: XXX-XXXX
DRN. BY:	CHK. BY:	LONG AND CROSS COLLECTOR FLIGHTS SHOP DRAWING		SHEET NO.:
CHIEF ENGR.:				SHEET 1 OF 1